

BEST AVAILABLE COPY

10/507008



PLC 625 10 1000



INVESTOR IN PEOPLE

Rec'd PCT/PTO 07 SEP 2004

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 13 JUN 2003


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

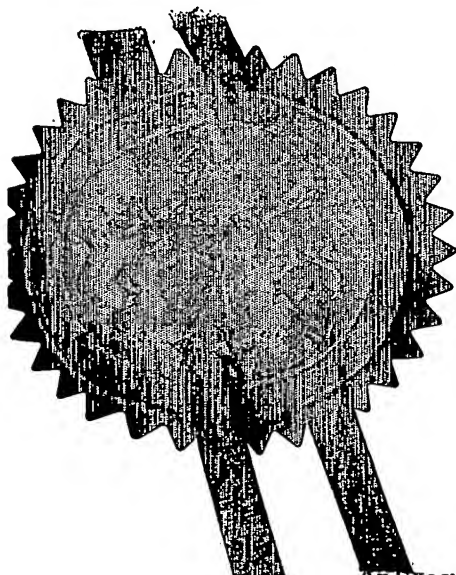

Signed

Dated 3 June 2003

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patents Form 1/77

**Patent
Office****1/77**Patents Act 1977
(Rule 16)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

1.	Your reference	P2786-GB		
2.	Patent application number <i>(The Patent Office will fill in this part)</i>	0206887.2		
3.	Full name, address and postcode of the or of each applicant <i>(underline all surnames)</i>	Tyco Electronics UK Ltd Faraday Road Dorcan Swindon Wiltshire SN3 5HH England & Wales		
	Patents ADP number <i>(if you know it)</i>	7993520001		
	If the applicant is a corporate body, give the country/state of its incorporation			
4.	Title of the invention	Modular Housing for Electrical Instrument and Mounting Member Therefor		
5.	Name of your agent <i>(if you have one)</i>	SHELLEY, Mark R.		
	"Address for service" in the United Kingdom to which all correspondence should be sent <i>(including the postcode)</i>	K R Bryer & Co 7 Gay Street Bath BA1 2PH		
	Patents ADP number <i>(if you know it)</i>	8305989001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and <i>(if you know it)</i> the or each application number	Country	Priority application number <i>(if you know it)</i>	Date of filing <i>(day / month / year)</i>
		GB		22 March 2002
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing <i>(day / month / year)</i>	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? <i>(Answer 'Yes' if:</i> a) <i>any applicant named in part 3 is not an inventor, or</i> b) <i>there is an inventor who is not named as an applicant, or</i> c) <i>any named applicant is a corporate body.</i> See note (d))	Yes		

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	12
Claim(s)	4
Abstract	1
Drawing(s)	5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application

Signature

Date

22 March 2002

12.

Name and daytime telephone number of person to contact in the United Kingdom

Mark R Shelley

01225 428877

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be notified if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 22 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office. Unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention, either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

MODULAR HOUSING FOR ELECTRICAL INSTRUMENT AND MOUNTING MEMBER THEREFOR

5 This invention relates to a modular housing for an electrical meter or metering type instrument, an electrical instrument comprising such a housing and a mounting member therefor. The invention particularly concerns an instrument housing adapted for housing one of a plurality of modular type electrical meter or metering instruments.

10 Electrical meter or metering instruments are usually provided with a display panel so that readings of the meter or metering instrument can be displayed either in analogue or digital form so that the readings can be read for monitoring recording or other purposes by users of equipment the instrument is being used for. Many meter or
15 metering type instruments are panel mounted, that is to say the display panel at one end of the instrument is mounted in a correspondingly sized aperture in a panel in which several instruments may be mounted. In panel mounted arrangements the display panel is mounted substantially flush with the panel surface, with the main body of the instrument being concealed behind the panel and out of sight of the user.

20 The instrument is typically mounted in a cantilever type manner with the instrument being supported in the aperture and secured to the panel in various ways.

There is an increasing demand for electrical meters or metering type instruments which are read remotely by a remote processor which may be located in a control

centre up to 100 metres or more from the instrument. Instruments for this type of application can be designed without a readable display unit allowing cost savings to be made or offset against the additional costs of a communication interface and installation cabling. Typically, electrical meter or metering type instruments that do not have a display screen are mounted differently to the panel mounted instruments with a display. Instruments without a display are usually either surface mounted, including wall mounting, or mounted on a DIN rail in a cabinet.

Hitherto, it has been necessary for instrument manufacturers to design and develop separate ranges of electrical meters or metering type instruments for panel mounted applications, where a display is required, and surface or rail mounted applications where the display can be replaced with a communications interface. This has led to significantly different designs of electrical instruments, with few shared components, for each of the mounting methods concerned. A consequence of the different mounting methods described is that very few components can be shared often because the principle dimensions of the instruments is determined by the method of mounting that is employed. For example, panel mounted instruments have to conform to a standard shape and size so that they fit standard panel apertures, for instance 92mm x 92mm for one particular standard. This results in different size and shaped housings for the instruments which prevents the use of common electrical components such as PCB's. The PCB's may contain the same discrete electrical components but the size and shape of the instrument determines that the fabrication of these components on the PCB and is usually different for each mounting application. This can have a significant impact on the cost of the instruments since lower production volumes can

prevent economies of scale being made.

According to an aspect of the invention there is a modular housing for enclosing an electrical meter or metering type instrument; the said housing being adapted for housing one of a plurality of modular type electrical meter or metering instruments including instruments with or without a readable display, the housing comprising at least one open end for receiving one of the said instruments within the housing and connection means for connection with an interchangeable end closure member which, in a first configuration, comprises a transparent display panel for a readable display, and in a second configuration, a mounting plate for mounting the said instrument with respect to a surface or a connector rail.

The modular housing according to this aspect of the invention readily enables a single housing to be used for a range of instruments including panel mounted, rail mounted and surface mounted instruments with or without a readable display. This can significantly reduce manufacturing and other associated production costs since it enables sharing of components, including the housing and other electrical components such as PCB's, across a range of instruments. This modular approach to the design and manufacture of the instruments can result in 90% of the components of a particular instrument being shared across a range of products. For example, by replacing the display screen of a panel mounted instrument with an interchangeable end closure member comprising a mounting plate for mounting the instrument directly or indirectly to a surface or a connector rail the remaining components can be shared for surface mounted, rail mounted and panel mounted applications. This can result

in significant cross savings since higher volume production volumes can be achieved for the shared components. The modular housing of this aspect of the invention readily provides for a modular range of instruments and this is not only advantageous in terms of production costs but also in terms of spare part inventories, maintenance
5 of the range of modular products and therefore greater customer or end user satisfaction. The modular housing also provides commonality between the principle external dimensions for a particular range of instruments sharing a common housing. This has the advantage of enabling limited cabinet space to be maximised since each instrument from a range of instruments will occupy the same amount of space. This
10 can also have the advantage that one instrument may be changed for another without having to rearrange the installation of a number of instruments within the cabinet.

Preferably, the said connection means comprises an interlocking engagement means capable of fixing the said interchangeable closure member to the said housing. The
15 interlocking engagement of the connection means readily enables the closure member to be fixed to the modular housing to close the housing at the open end which would otherwise be closed by the transparent display panel in the panel mounted application. In this way the connection means readily enables the modular housing to be closed in a simple and cost effective manner.

20

In preferred embodiments the said connection means comprises part of an interlocking resilient clip arrangement. The clip may provide a snap-fit connection for closing the housing and additionally or alternatively may be provided with release means for releasing the inter engagement of the clip arrangement so that the closure member can

be removed for maintenance or other purposes.

According to another aspect of the invention, there is also provided an electrical meter or metering instrument comprising a housing according to the aforementioned aspect of the invention. It will be appreciated that the instrument may comprise any electrical meter or metering type instrument including but not limited to analogue or digital type ammeters, voltmeters, wattmeters, varimeters, electrical energy usage meters including kilowatt hour meters and the like, electronic meter relays, phase sequence meters, for example. This aspect of the invention also contemplates electrical instruments which have a readable display and/or a communications interface for connection to a communication link for remote reading of the instrument. The electrical instrument may comprise any meter or metering type instrument which measures, monitors, records or responds to electrical parameter values.

According to a further aspect of the invention there is a modular housing for enclosing an electrical meter or metering type instrument; the said housing being adapted for housing one of a plurality of modular type electrical meter or metering instruments including instruments with or without a readable display, the housing having at least one open end for receiving one of the said instruments within the housing and an interchangeable closure member for closing the said open end, the closure member having first connection means for inter-engagement with the said open end and second connection means for mounting the said instrument to a surface or a connector rail.

Preferably, the said second connection means comprises a DIN rail connector. The

DIN rail connector enables the housing and instrument contained therein to be mounted on a standard DIN rail as is commonly used for mounting electrical meter or metering type instruments in cabinets or the like. In this respect the closure member constitutes a mounting member or mounting plate which not only closes the modular housing containing the instrument but also provides a means for mounting the housing on a DIN rail. This minimises the number of components that are specific to the type of mounting since the closure member can readily incorporate the mounting for the housing of an instrument. In this respect it will be appreciated that all the components of a panel mounted instrument, less the display and display electronics, may be used in a DIN rail mounted instrument by replacing the display panel with an interchangeable end plate in the form of a closure member having a DIN rail connector.

Preferably, the said connection means comprises an elongate channel for engagement with part of a DIN rail and latching means for releasably connecting the said housing to the DIN rail. The channel readily enables the housing to be supported along its width from one side of the instrument to the other when mounted on the DIN rail, which mounting may result in the instrument being cantilevered from the DIN rail connector and therefore the channel readily enables the weight of the housing and instrument to be supported over a greater area. The latching means readily enables the housing and instrument to be releasably connected to the DIN rail so that the instrument can be easily installed and removed from the rail while forming a secure connection following installation.

In another embodiment, the said second connection means comprises fastening means for fixing the said closure member directly to a surface on which the instrument is to be mounted or to an surface mounting plate for indirect attachment to the said surface. In this way the closure member is provided with surface mounting means for either directly mounting the housing on a surface such as a wall or for mounting the closure member to a surface using an intermediate mounting plate. If an intermediate mounting plate is used the same closure member may be used for DIN rail mounting as surface mounting by providing further mounting means for fixing the closure member to a surface mounting end plate, for example. If a surface mounting end plate is used it is preferred that the mounting plate has dimensions greater than that of the closure member to enable the mounting plate to be easily mounted using mounting screws or the like around the periphery of the housing.

In a further aspect of the invention there is mounting member for mounting a modular housing of an electrical meter or metering type instrument; the said housing being adapted for housing one of a plurality of modular type electrical meter or metering instruments including instruments with or without a readable display, the said mounting member being adapted to close an open end of the said housing and having first connection means for inter-engagement with the said open end and second connection means for mounting the said instrument to a surface or a connector rail. The closure member according to this aspect of the invention can therefore be used for closing the open end of a modular housing according to the aforementioned aspects of the invention and for mounting the housing to either a surface a connector rail, preferably a DIN rail, or to both. It will be understood that the closure member

is interchangeable so that different closure members having different mounting adaptations can be used according to the mounting application requirement.

Various embodiments of the invention will now be more particularly described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is an exploded perspective view of an electrical meter or metering type instrument having a housing according to an arrangement of the present invention;

Figure 2 is an exploded perspective view similar to that of Figure 1 but with the instrument viewed in the opposite direction with the housing and a housing closure and mounting member positioned at the opposite to that of Figure 1;

Figure 3 is a side elevation view of the housing with a closure member according to one arrangement of the invention;

Figure 4 is a perspective view of the housing closure member shown in Figures 2 and 3 on the side that is furthest from the housing when installed;

Figure 5 is a side elevation view similar to that of Figure 3 with a closure and mounting member according to a further arrangement of the present invention; and

Figure 6 is a perspective view of an enclosed electrical instrument with a housing having a closure and mounting member according to the arrangement of Figure 5.

Referring to Figure 1, a modular type electrical meter or metering instrument comprises a plurality of electrical components common to various instrument mounting configurations, for example panel mounting, surface mounting and rail

mounting applications. The instrument shown in Figure 1 is adapted for panel mounting and includes a readable display 14 which may be an LCD, LED or plasma screen display mounted on a PCB. The electrical components 12 and 14 are enclosed within a rectangular or square cross-section housing 16 which is closed at a front end thereof, to the left of the drawing in Figure 1, by a glass or perspex transparent screen element 18 which locates in a recess 20 around the periphery of the housing 16 at the open end thereof. A frame element 22 sandwiches the screen 18 between the housing and the frame.

10 The housing 16 has standard dimensions for panel mounting applications and in this particular example the housing measures 92mm x 92mm, although other standard and non-standard sizes of housing may be used.

Referring to Figure 2, which shows an electrical instrument similar to that of Figure 15 1 but from the opposite end so that the electrical components 12 common to both instruments are shown to the left hand side of the drawing in Figure 2 and the common modular housing 16 to the right hand side of the drawing. In this arrangement the display 14, screen 18 and frame 22 are not required and the open end of the housing closed by the screen 18 in the arrangement of Figure 1 is closed by an 20 interchangeable mounting panel generally indicated 24. The instrument of Figure 2 is identical in every other respect to that of Figure 1 except that instead of having a readable display the electrical parameter or parameters read, monitored or recorded by the instrument are transmitted on a communications link, for example a transmission line connected to a communications interface card in the instrument, to

a remote location, for example a centralised control unit.

The interchangeable closure member 24 comprises a first end plate 26 which has dimensions substantially the same as that of the housing 16 so that it can close the end
5 of the housing in the same way that the screen 18 closes the housing in Figure 1. The surface of the closure element 26 includes a plurality of upstanding resilient interlocking engagement clips 28 which extend perpendicularly from the surface of the closure member and are positioned inwards of the outer periphery so that they engage corresponding interlocking parts (not shown) on the inner surface of the
10 housing 16 to form an interlocking engagement between the housing and the closure 26.

The closure member 26 can be used for either surface mounting the housing and instrument to a wall or other like surface or for mounting the instrument to a rail such
15 as a standard DIN rail, as are commonly used for mounting such instruments in electrical cabinets and the like.

Prior to interengagement of the closure 26 with the housing 16 the closure can be secured to a surface mounting plate 30 by fastening means 32 which may comprise
20 bolts, screws or other means. The surface mounting plate 30 is secured to the opposite side of the closure member 26 when it is required to provide a surface mount for the instrument 10.

The surface mounting plate 30 has at least one dimension greater than that of the

closure member 26 so that it extends beyond the periphery of the closure member so that holes 34 can be provided in the protruding parts for fixing the mounting plate and hence instrument 10 to a surface.

5 In preferred embodiments the closure member 26 and mounting plate 30 are separate components, however the invention also contemplates embodiments in which the closure member 26 is integral with the mounting plate 30 so that fastening means 32 are not required. In the arrangement of Figure 2 the closure member 26 can be used for both mounting the instrument on a standard DIN rail or for use in combination
10 with the mounting plate 30 for surface mounting applications. This will become further apparent from the description that is to follow with reference to Figures 4 to 6.

Referring to Figure 3, which shows the instrument 10 with housing 16 having a
15 closure member 26 mounting the instrument to a standard DIN rail 36. The rear surface of the closure member 26 as shown to the right of the drawing in Figure 3, is provided with a generally U-shaped elongate channel 38 which extends from one side of the closure member to the other for receiving the DIN rail 36. As can be seen in the drawing the DIN channel has a "top hat" cross section which defines a pair of
20 parallel lips 40 along the edges of the rail. One of the walls of the channel 38 is provided with an upstanding projection 42 for engagement with one of the lipped edges 40 for locating the rail 36 within the channel. The other side of the channel is provided with a latch or release clip 44 which is resiliently biased to engage the other lipped edge of the rail 36. In the engaged position shown in Figure 3 the latch

44 prevents movement of the instrument 10 with respect to the rail when mounted.

The reverse side or rail side of the closure member 26 described in Figures 2 and 3 can best be seen in the drawings of Figure 4 which shows the rail 36 located in the
5 channel 38 and secured thereto by the latch 44.

Referring now to Figure 5, which shows the instrument assembled in the housing 16 closed by the closure member 26 and secured to a surface mounting plate 30 for attachment to a wall or other surface by screws or other means.

10

Referring to Figure 6 which shows a side elevation of a surface mounting arrangement similar to that of Figure 5 but with an integral closure arrangement 24 in which a single mounting plate is used for surface mounting the instrument to a wall or other surface. In this arrangement the closure member is substantially identical to the
15 combined closure member 26 and mounting plate 30 but is integrally formed without the rail mounting features referred to in Figures 3 and 4.

Although the invention has been described with reference to embodiments shown in the accompanying drawings it is to be understood that the invention is not so limited
20 to those precise embodiments and that various changes and modifications may be effected without further inventive skill and effort. For example, the interchangeable closure and mounting member may be provided with mounting features for mounting arrangements other than surface and DIN rail mounting.

CLAIMS

1. A modular housing for enclosing an electrical meter or metering type
5 instrument; the said housing being adapted for housing one of a plurality of modular
type electrical meter or metering instruments including instruments with or without
a readable display, the housing comprising at least one open end for receiving one of
the said instruments within the housing and connection means for connection with an
interchangeable end closure member which, in a first configuration, comprises a
10 transparent display panel for a readable display, and in a second configuration, a
mounting plate for mounting the said instrument with respect to a surface or a
connector rail.

2. A housing as claimed in Claim 1 wherein the said connection means
15 comprises an interlocking engagement means capable of fixing the said
interchangeable closure member to the said housing.

3. A housing as claimed in Claim 1 wherein the said connection means
comprises part of an interlocking resilient clip arrangement.

20

4. An electrical meter or metering instrument comprising a housing according
to any of Claims 1 to 3.

5. An electrical meter or metering instrument comprising a housing according

to any of Claims 1 to 3 wherein the said instrument comprises one of an analogue or digital ammeter, voltmeter, wattmeter, varimeter, electrical energy usage meter including a kilowatt hour meter, an electronic meter relay, phase sequence meter, and having a readable display or a communications link for remote reading of the said instrument

6. A modular housing for enclosing an electrical meter or metering type instrument; the said housing being adapted for housing one of a plurality of modular type electrical meter or metering instruments including instruments with or without a readable display, the housing having at least one open end for receiving one of the said instruments within the housing and an interchangeable closure member for closing the said open end, the closure member having first connection means for inter-engagement with the said open end and second connection means for mounting the said instrument to a surface or a connector rail.

15

7. A housing as claimed in Claim 6 wherein the said second connection means comprises a DIN rail connector.

8. A housing as claimed in Claim 7 wherein the said connection means comprises an elongate channel for engagement with part of a DIN rail and latching means for releasably latching the said housing to the DIN rail.

9. A housing as claimed in Claim 6 wherein the said second connection means comprises fastening means for fixing the said closure member directly to a surface

on which the instrument is to be mounted or to an surface mounting plate for indirect attachment to the said surface.

10. A mounting member for mounting a modular housing of an electrical meter
5 or metering type instrument; the said housing being adapted for housing one of a plurality of modular type electrical meter or metering instruments including instruments with or without a readable display, the said mounting member being adapted to close an open end of the said housing and having first connection means for inter-engagement with the said open end and second connection means for
10 mounting the said instrument to a surface or a connector rail.

11. A mounting member as claimed in Claim 10 wherein the said second connection means comprises a DIN rail connector.

12. A mounting member as claimed in Claim 11 wherein the said connection means comprises an elongate channel for engagement with part of a DIN rail and latching means for latching the said housing to the DIN rail.

13. A mounting member as claimed in Claim 10 wherein the said second
20 connection means comprises fastening means for fixing the said closure member directly to a surface on which the instrument is to be mounted or to an surface mounting plate for indirect attachment to the said surface.

14. A mounting member as claimed in any of Claims 10 to 13 wherein the said

first connection means comprises part of an interlocking resilient clip arrangement
fixing the said closure member to the said open end of the housing..

15. A mounting member as claimed in any of Claims 10 to 14 wherein the sa
5 first connection means is located on one side of the closure member and the sa
second connection means on the opposite side thereof.

16. A mounting member as claimed in any one of Claims 10 to 15 compris
both a DIN rail connection means and a surface mounting connection means.

10

17. A mounting member as claimed in any one of Claims 10 to 16 wherein th
closure member comprises an end plate.

18. A modular housing substantially as hereinbefore described and/or wit
15 reference to the accompanying drawings

19. A mounting member substantially as hereinbefore described and/or wit
reference to the accompanying drawings.

20 20. An electrical meter or metering instrument substantially as hereinbefor
described and/or with reference to the accompanying drawings.

ABSTRACT**MODULAR HOUSING FOR ELECTRICAL INSTRUMENT AND
MOUNTING MEMBER THEREFOR**

5

The invention provides, in one aspect, a modular housing (16) for enclosing an electrical meter or metering type instrument. The housing is adapted for housing one of a plurality of modular type electrical meter or metering instruments, including
10... instruments with or without a readable display. The housing comprises at least one open end for receiving an instrument or instrument components and an interchangeable closure member (26) for closing the open end. The closure member has a first connection means for inter-engagement with the open end of the housing and second connection means for mounting the instrument to a surface such as a wall
15 or a connector rail, preferably a DIN rail. The housing may be used for surface, panel and rail mounted instruments of the same type.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.